
SPECIFICATION SHEET

COLLECTION: CELSIUS

PRODUCT CODE: CEL-131T-C/P





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

TAP TYPE

Bath Shower Mixer

PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

HOLES

2 Hole

MOUNTING

Deck Mounted

WITH INTEGRATED DIVERTER

No

WITH EASY-FIT BRACKETS

No

WITH SHOWER KIT

Νo

WITH THERMOSTATIC TECHNOLOGY

Yes

FOR USE WITH BATH FILLER WASTE AND OVERFLOW

No

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS



SPECIFICATION SHEET

COLLECTION: CELSIUS

PRODUCT CODE: CEL-131T-C/P

MINIMUM OPERATING PRESSURE

1.5 Bar MP

MAXIMUM OPERATING PRESSURE

5.0 Bar HP

FLOW RATE AT 3.0 BAR FLOW PRESSURE

Spout: 29 l/min, Diverter: 27.9 l/min

RECOMMENDED FLOW REGULATOR

FR-SHOWER/9-C/P

WITH BATH SPOUT

Yes

WITH AIR-INJECTION TECHNOLOGY

WITH WATER FLOW STRAIGHTENER

WITH WATER FLOW AERATOR

Yes

CONNECTIONS / FITTINGS

2x 3/4" 50mm threaded connection on legs

DECK HOLE DRILL DIAMETER


28mm

SPARE PARTS

thermostatic cartridge V-704-34S diverter cartridge C-801-33/2SX

STYLE

Round



WHERE INSPIRATION FLOWS www.vado.com TAPS | SHOWERS | FURNITURE



SPECIFICATION SHEET

COLLECTION: CELSIUS

PRODUCT CODE: CEL-131T-C/P

FINISH

Chrome

COLLECTION NAME

Celsius

GUARANTEE

15 Year Guarantee

tel: 01934 744466 email: sales@vado.com www.vado.com






TECHNICAL DRAWING

COLLECTION: CELSIUS

PRODUCT CODE: CEL-131T-C/P

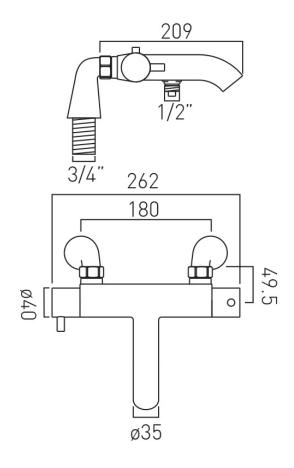

tel: 01934 744466 email: sales@vado.com

www.vado.com



