

# SPECIFICATION SHEET

**COLLECTION:** AXBRIDGE

**PRODUCT CODE:** BC-AXB-148-BN



**DESCRIPTION:**

Axbridge  
1 Outlet 2 Handle Thermostatic Valve  
wall mounted  
Flow cartridge FL-301-RTC  
2 x 3/4" female inlets  
1 x 3/4" female outlet  
includes 3/4" - 1/2" adaptors  
supplied with mortar/tile guard  
min-max wall mount 75-100mm  
minimum operating pressure  
0.2 bar LP (shower) 1.0 bar MP (bath)

**FINISH:**


Bright Nickel

**MINIMUM OPERATING PRESSURE:**

0.2 bar LP (shower) 1.0 bar MP (bath)

**FLOW RATE AT 3.0 BAR FLOW PRESSURE:**

41 l/min

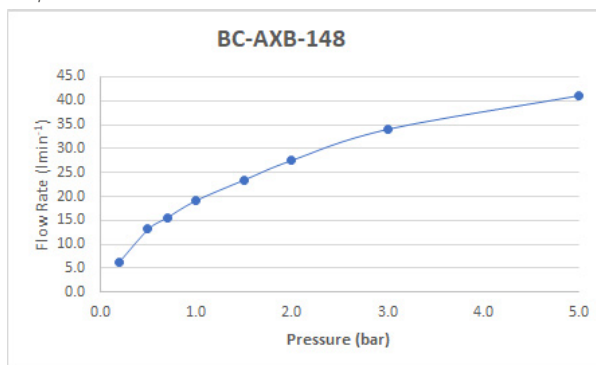

**BOOTH & Co.**  
ENGLAND


Timeless Design. Pioneering Performance.

Your journey to distinction awaits.

# TECHNICAL DRAWING

**COLLECTION:** AXBRIDGE

**PRODUCT CODE:** BC-AXB-148-BN

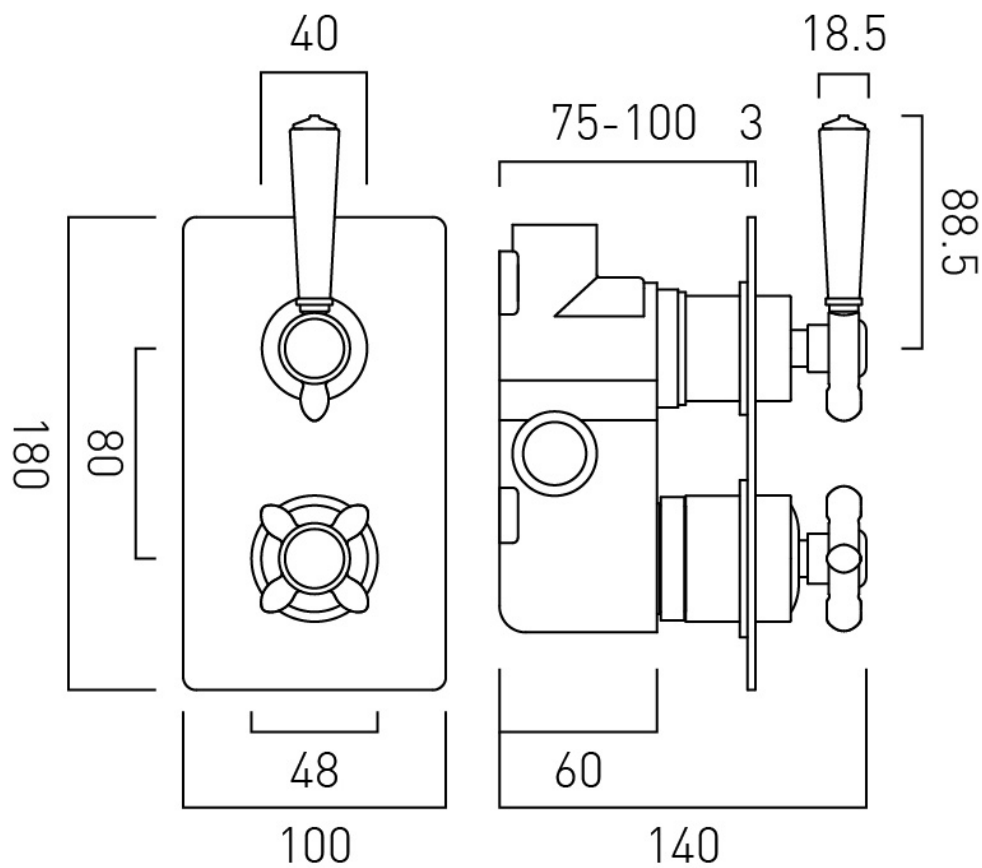

**BOOTH & Co.**  
ENGLAND

Timeless Design. Pioneering Performance.

Your journey to distinction awaits.

01934 744466 | sales@vado.com | www.vado.com/booth-and-co