
# SPECIFICATION SHEET

COLLECTION: KNURLED ACCENTS PRODUCT CODE: IND-T148/2-H-BRZK





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

### SHOWER TYPE

Shower Valve

# **VALVE TYPE**

Concealed

# STYLE

Knurled

# ORIENTATION

Horizontal

### NUMBER OF OUTLETS

2 Outlet

### **HANDLES**

2 Handle

### WITH ALL-FLOW FUNCTION

Yes

# WITH INTEGRATED DIVERTER

No

# COMPATIBLE WITH STUDFAST

Yes

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS



# SPECIFICATION SHEET

COLLECTION: KNURLED ACCENTS PRODUCT CODE: IND-T148/2-H-BRZK

WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION

Nο

WITH SHOWER KIT

Νo

INCLUDES MORTAR / TILE GUARD

Yes

COMPATIBLE WITH EASY-FIX BRACKETS

No

WITH THERMOSTATIC TECHNOLOGY

Yes

**INSTALLATION TOLERANCES** 

min-max wall mount 75-100mm optimum installation depth 87mm

**CONNECTIONS / FITTINGS** 

 $2 \times 3/4$ " female inlets /  $2 \times 3/4$ " female outlets

SPARE PARTS

thermostatic cartridge V-704-34S diverter cartridge FL-802-33/2MX

MOUNTING

Wall Mounted

PLUMBING SYSTEM SUITABILITY

Gravity System, Pumped System, Combination Boiler, Pressurised System

**COLLECTION NAME** 

Knurled Accents

FINISH

Brushed Bronze







# SPECIFICATION SHEET

COLLECTION: KNURLED ACCENTS PRODUCT CODE: IND-T148/2-H-BRZK

### MINIMUM OPERATING PRESSURE

0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

### MAXIMUM OPERATING PRESSURE

5.0 Bar HP

### GUARANTEE

15 Year Guarantee


tel: 01934 744466 email: sales@vado.com www.vado.com






# TECHNICAL DRAWING

COLLECTION: KNURLED ACCENTS PRODUCT CODE: IND-T148/2-H-BRZK



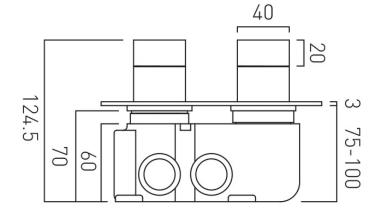



www.vado.com



