
SPECIFICATION SHEET

COLLECTION: ELEMENTS PRODUCT CODE: IND-ELE148D/2-BRZ





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

SHOWER TYPE

Shower Valve

VALVE TYPE Concealed

ORIENTATION Vertical

NUMBER OF OUTLETS 2 Outlet

WITH ALL-FLOW FUNCTION No

WITH INTEGRATED DIVERTER

No COMPATIBLE WITH STUDFAST Yes WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION Yes WITH SHOWER KIT No

tel: 01934 744466 email: sales@vado.com www.vado.com

WHERE INSPIRATION FLOWS



SPECIFICATION SHEET

COLLECTION: ELEMENTS PRODUCT CODE: IND-ELE148D/2-BRZ

INCLUDES MORTAR / TILE GUARD

Yes

COMPATIBLE WITH EASY-FIX BRACKETS

No

WITH THERMOSTATIC TECHNOLOGY

Yes

INSTALLATION TOLERANCES min-max wall mount 70-95mm optimum installation depth 82mm

CONNECTIONS / FITTINGS 2 x 3/4" female inlets 2 x 3/4" female outlets

SPARE PARTS thermostatic cartridge V-704-34S diverter cartridge C-803-33X/3X

MOUNTING Wall Mounted

PLUMBING SYSTEM SUITABILITY Gravity System, Pumped System, Combination Boiler, Pressurised System

COLLECTION NAME

Elements

FINISH Brushed Bronze

MINIMUM OPERATING PRESSURE 0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

MAXIMUM OPERATING PRESSURE 5.0 Bar HP

WHERE INSPIRATION FLOWS



SPECIFICATION SHEET

COLLECTION: ELEMENTS PRODUCT CODE: IND-ELE148D/2-BRZ

GUARANTEE 15 Year Guarantee


tel: 01934 744466 email: sales@vado.com www.vado.com

WHERE INSPIRATION FLOWS TAPS | SHOWERS | FURNITURE



TECHNICAL DRAWING

COLLECTION: ELEMENTS PRODUCT CODE: IND-ELE148D/2-BRZ

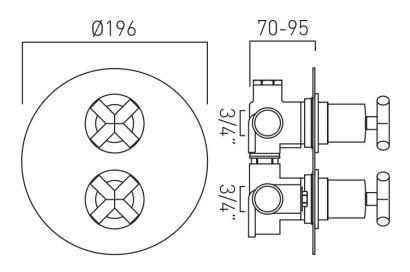

tel: 01934 744466 email: sales@vado.com www.vado.com

WHERE INSPIRATION FLOWS

