
SPECIFICATION SHEET

COLLECTION: TABLET KNURLED ACCENTS PRODUCT CODE: TAB-128/3-H-CPK





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

SHOWER TYPE

Shower Valve

VALVE TYPE Concealed

ORIENTATION Horizontal

NUMBER OF OUTLETS 3 Outlet

WITH ALL-FLOW FUNCTION Yes WITH INTEGRATED DIVERTER No COMPATIBLE WITH STUDFAST Yes WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION No WITH SHOWER KIT No

tel: 01934 744466 email: sales@vado.com www.vado.com



SPECIFICATION SHEET

COLLECTION: TABLET KNURLED ACCENTS PRODUCT CODE: TAB-128/3-H-CPK

INCLUDES MORTAR / TILE GUARD

Yes

COMPATIBLE WITH EASY-FIX BRACKETS

No

WITH THERMOSTATIC TECHNOLOGY

Yes

INSTALLATION TOLERANCES min-max wall mount 75-100mm optimum installation depth 87mm

CONNECTIONS / FITTINGS 2 x 3/4" female inlets 3 x 3/4" female outlets

SPARE PARTS thermostatic cartridge V-704-34S diverter cartridge FL-802-33/2MX flow cartridge FL-301-RTC

MOUNTING Wall Mounted

PLUMBING SYSTEM SUITABILITY Gravity System, Pumped System, Combination Boiler, Pressurised System

COLLECTION NAME Tablet Knurled Accents

FINISH Chrome

MINIMUM OPERATING PRESSURE 0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

MAXIMUM OPERATING PRESSURE 5.0 Bar HP



SPECIFICATION SHEET

COLLECTION: TABLET KNURLED ACCENTS PRODUCT CODE: TAB-128/3-H-CPK


GUARANTEE 15 Year Guarantee

tel: 01934 744466 email: sales@vado.com www.vado.com



TECHNICAL DRAWING

COLLECTION: TABLET KNURLED ACCENTS PRODUCT CODE: TAB-128/3-H-CPK

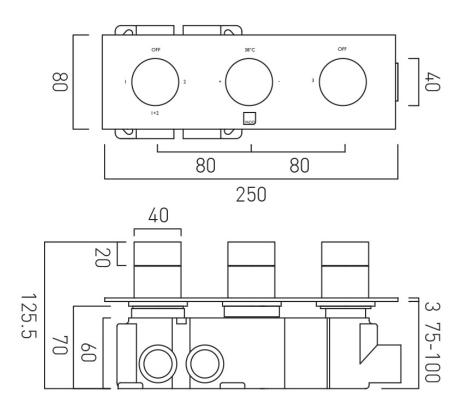

tel: 01934 744466 email: sales@vado.com www.vado.com

