
# SPECIFICATION SHEET

## COLLECTION: OMIKA PRODUCT CODE: OMI-100/SB-C/P





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

### TAP TYPE

Basin Mixer

FINISH Chrome

COLLECTION NAME Omika

GUARANTEE 15 Year Guarantee

### PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

MINIMUM OPERATING PRESSURE

1.0 Bar MP

#### MAXIMUM OPERATING PRESSURE

5.0 Bar HP

#### MOUNTING

Deck Mounted

### RECOMMENDED FLOW REGULATOR

4 l/m flow regulator fitted as standard

tel: 01934 744466 email: sales@vado.com www.vado.com

WHERE INSPIRATION FLOWS



# SPECIFICATION SHEET

# COLLECTION: OMIKA PRODUCT CODE: OMI-100/SB-C/P

WITH ECOTURN COLD START TECHNOLOGY

No

WITH WATER FLOW STRAIGHTENER

No

WITH WATER FLOW AERATOR

Yes

CONNECTIONS / FITTINGS

 $2 \times 1/2$ " 400mm flexipipe connections

## DECK HOLE DRILL DIAMETER

35mm

SPARE PARTS

2 x FL-401-RTC

NOTES 1/4 turn ceramic disc valves


tel: 01934 744466 email: sales@vado.com www.vado.com

WHERE INSPIRATION FLOWS



# TECHNICAL DRAWING

## COLLECTION: OMIKA PRODUCT CODE: OMI-100/SB-C/P

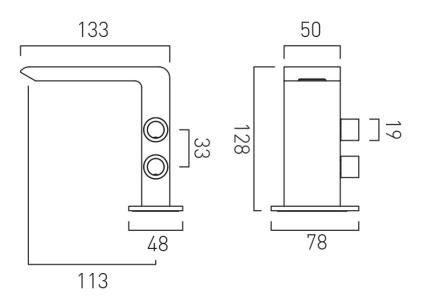

tel: 01934 744466 email: sales@vado.com www.vado.com

WHERE INSPIRATION FLOWS

