
SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

TAP TYPE

Bath Shower Mixer

PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

HOLES

4 Hole

MOUNTING

Deck Mounted

WITH INTEGRATED DIVERTER

Nο

WITH EASY-FIT BRACKETS

No

WITH SHOWER KIT

Yes

WITH THERMOSTATIC TECHNOLOGY

FOR USE WITH BATH FILLER WASTE AND OVERFLOW

Yes

tel: 01934 744466 email: sales@vado.com

WHERE INSPIRATION FLOWS www.vado.com TAPS | SHOWERS | FURNITURE



SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

MINIMUM OPERATING PRESSURE

1.0 Bar MP

MAXIMUM OPERATING PRESSURE

5.0 Bar HP

RECOMMENDED FLOW REGULATOR

FR-FLEXI/8-PLA

WITH BATH SPOUT

No

WITH AIR-INJECTION TECHNOLOGY

Nο

WITH WATER FLOW STRAIGHTENER

No

WITH WATER FLOW AERATOR

No

INSTALLATION TOLERANCES

min-max bath thickness 1mm - 40mm

CONNECTIONS / FITTINGS

1 x 1/2" x 3/8" 200cm shower hose 2 x 3/4" x 3/4" 600mm flexipipe connections

DECK HOLE DRILL DIAMETER


35mm

SPARE PARTS

1/4 turn ceramic disc valves FL-301-RTC FL-301-LTC ceramic diverter cartridge FL-803-33/2X

FINISH

Chrome





SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

COLLECTION NAME

0mika

GUARANTEE

15 Year Guarantee

tel: 01934 744466 email: sales@vado.com

www.vado.com






TECHNICAL DRAWING

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

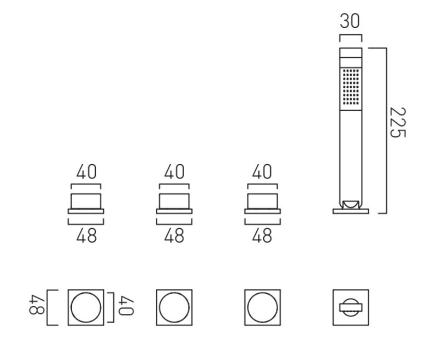



www.vado.com

