


# SPECIFICATION SHEET

COLLECTION: OMIKA  
PRODUCT CODE: OMI-135/NS-C/P

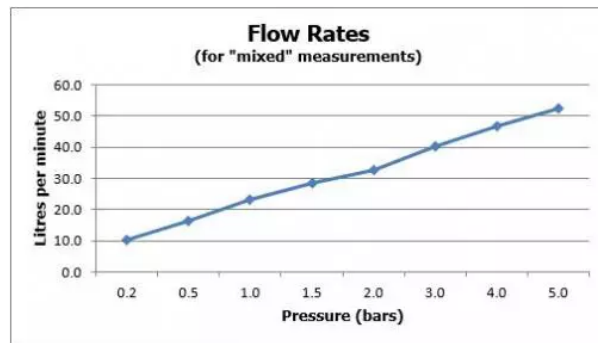

The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

## TAP TYPE

Bath Shower Mixer

## FOR USE WITH BATH FILLER WASTE AND OVERFLOW

Yes

## WITH SHOWER KIT

Yes

## WITH BATH SPOUT

No

## WITH EASY-FIT BRACKETS

No

## WITH AIR-INJECTION TECHNOLOGY

No

## WITH INTEGRATED DIVERTER

No

## WITH WATER FLOW STRAIGHTENER

No

## WITH THERMOSTATIC TECHNOLOGY

No

tel: 01934 744466  
email: sales@vado.com  
www.vado.com

WHERE INSPIRATION FLOWS  
TAPS | SHOWERS | FURNITURE



# SPECIFICATION SHEET

COLLECTION: OMIKA  
PRODUCT CODE: OMI-135/NS-C/P

## WITH WATER FLOW AERATOR

No

## INSTALLATION TOLERANCES

min-max bath thickness 1mm - 40mm

## CONNECTIONS / FITTINGS

1 x 1/2" x 3/8" 200cm shower hose 2 x 3/4" x 3/4" 600mm flexipipe connections

## SPARE PARTS

1/4 turn ceramic disc valves FL-301-RTC FL-301-LTC ceramic diverter cartridge FL-803-33/2X

## DECK HOLE DRILL DIAMETER

35mm

## HOLES

4 Hole

## MOUNTING

Deck Mounted

## PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

## COLLECTION NAME

Omika

## FINISH

Chrome

## RECOMMENDED FLOW REGULATOR

FR-FLEXI/8-PLA

## MINIMUM OPERATING PRESSURE

1.0 Bar MP

# SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

MAXIMUM OPERATING PRESSURE

5.0 Bar HP

GUARANTEE

15 Year Guarantee

tel: 01934 744466  
email: [sales@vado.com](mailto:sales@vado.com)  
[www.vado.com](http://www.vado.com)

WHERE INSPIRATION FLOWS  
TAPS | SHOWERS | FURNITURE



# TECHNICAL DRAWING

COLLECTION: OMIKA  
PRODUCT CODE: OMI-135/NS-C/P

