
### SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-H-XNBK





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

### SHOWER TYPE

Shower Valve

### **VALVE TYPE**

Concealed

### ORIENTATION

Horizontal

### NUMBER OF OUTLETS

1 Outlet

### WITH ALL-FLOW FUNCTION

Yes

### WITH INTEGRATED DIVERTER

No

### COMPATIBLE WITH STUDFAST

Yes

### WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION

No

### WITH SHOWER KIT

No

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS



## SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-H-XNBK

### INCLUDES MORTAR / TILE GUARD

Yes

### COMPATIBLE WITH EASY-FIX BRACKETS

No

### WITH THERMOSTATIC TECHNOLOGY

Yes

### **INSTALLATION TOLERANCES**

min-max wall mount 75-100mm optimum installation depth 87mm

### **CONNECTIONS / FITTINGS**

2 x 3/4" female inlets / 2 x 3/4" female outlets

### SPARE PARTS

thermostatic cartridge V-704-34S diverter cartridge FL-802-33/2MX

### MOUNTING

Wall Mounted

### PLUMBING SYSTEM SUITABILITY

Gravity System, Pumped System, Combination Boiler, Pressurised System

### **COLLECTION NAME**

Knurled X Fusion

### **FINISH**

Nickel/Black

### MINIMUM OPERATING PRESSURE

0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

### MAXIMUM OPERATING PRESSURE

5.0 Bar HP

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS
TAPS | SHOWERS | ACCESSORIES



# SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-H-XNBK

### GUARANTEE

15 Year Guarantee

tel: 01934 744466 email: sales@vado.com


www.vado.com






### TECHNICAL DRAWING

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T148/2-H-XNBK



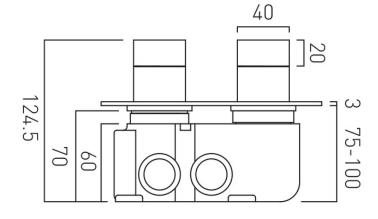

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS

