
SPECIFICATION SHEET

COLLECTION: EDIT

PRODUCT CODE: IND-EDI145A-BLK





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

SHOWER TYPE

Shower Valve

VALVE TYPE

Concealed

NUMBER OF OUTLETS

1 Outlet

HANDLES

Single Lever

WITH ALL-FLOW FUNCTION

No

WITH INTEGRATED DIVERTER

No

COMPATIBLE WITH STUDFAST

Νo

WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION

No

WITH SHOWER KIT

No

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS



SPECIFICATION SHEET

COLLECTION: EDIT

PRODUCT CODE: IND-EDI145A-BLK

INCLUDES MORTAR / TILE GUARD

No

COMPATIBLE WITH EASY-FIX BRACKETS

No

WITH THERMOSTATIC TECHNOLOGY

No

INSTALLATION TOLERANCES

min-max wall mount 40-65mm

CONNECTIONS / FITTINGS

2 x 1/2" female inlets 2 x 1/2" female outlets (one is blanked off)

SPARE PARTS

ceramic cartridge CAR-K35A

MOUNTING

Wall Mounted

PLUMBING SYSTEM SUITABILITY

Gravity System, Pumped System, Combination Boiler, Pressurised System

COLLECTION NAME

Edit

FINISH

Brushed Black

MINIMUM OPERATING PRESSURE

0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

MAXIMUM OPERATING PRESSURE

5.0 Bar HP

tel: 01934 744466 email: sales@vado.com

www.vado.com





SPECIFICATION SHEET

COLLECTION: EDIT

PRODUCT CODE: IND-EDI145A-BLK

GUARANTEE

15 Year Guarantee

tel: 01934 744466 email: sales@vado.com www.vado.com






TECHNICAL DRAWING

COLLECTION: EDIT

PRODUCT CODE: IND-EDI145A-BLK

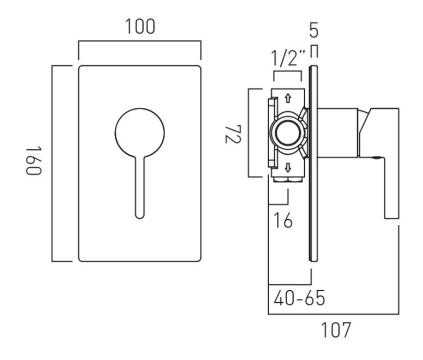

tel: 01934 744466 email: sales@vado.com

www.vado.com



